




MIC-IRL3803


140 Amps, 30 Volts N-CHANNEL MOSFET

Features

- 140A,30V, $R_{DS(ON)MAX}=4.0\text{m}\Omega$ @ $V_{GS}=10\text{V}/20\text{A}$
 $R_{DS(ON)MAX}=5.0\text{m}\Omega$ @ $V_{GS}=4.5\text{V}/10\text{A}$
- Low gate charge
- Low C_{iss}
- Fast switching
- 100% avalanche tested
- Improved dv/dt capability



TO-263



Absolute Maximum Ratings ($T_c=25^\circ\text{C}$, unless otherwise noted)

Parameter	Symbol	MIC-IRL3803	UNIT
Drain-Source Voltage	V_{DSS}	30	V
Gate-Source Voltage	V_{GSS}	± 20	
Continuous Drain Current	I_D	140	A
Pulsed Drain Current (Note 1)	I_{DM}	560	
Single Pulse Avalanche Energy (Note 2)	E_{AS}	150	mJ
Operating Junction and Storage Temperature Range	T_J, T_{STG}	-55 to +150	°C
Maximum lead temperature for soldering purposes, 1/8" from case for 5 seconds	T_L	260	°C

Thermal Characteristics

Parameter	Symbol	TO-263	Units
Thermal resistance, Junction to Case	$R_{th(J-C)}$	1.05	°C/W
Maximum Power Dissipation	$T_c=25^\circ\text{C}$	P_D	120



Electrical Characteristics ($T_c=25^\circ\text{C}$, unless otherwise noted)


Parameter	Symbol	Test Conditions	Min	Typ	Max	Units
Off Characteristics						
Drain-Source Breakdown Voltage	BV_{DSS}	$\text{V}_{\text{GS}}=0\text{V}, \text{I}_D=250\text{uA}$	30	—	—	V
Zero Gate Voltage Drain Current	I_{DSS}	$\text{V}_{\text{DS}}=30\text{V}, \text{V}_{\text{GS}}=0\text{V}$	—	—	1	μA
Gate-Body Leakage Current,Forward	I_{GSS}	$\text{V}_{\text{GS}}=\pm 20\text{V}, \text{V}_{\text{DS}}=0\text{V}$	—	—	± 100	nA
On Characteristics						
Gate-Source Threshold Voltage	$\text{V}_{\text{GS(th)}}$	$\text{V}_{\text{DS}}=\text{V}_{\text{GS}}, \text{I}_D=250\text{uA}$	0.5	—	2.5	V
Drain-Source On-State Resistance	$\text{R}_{\text{DS(on)}}$	$\text{V}_{\text{GS}}=10\text{V}, \text{I}_D=20\text{A}$	—	3.1	4.0	$\text{m } \Omega$
		$\text{V}_{\text{GS}}=4.5\text{V}, \text{I}_D=10\text{A}$	—	4.0	5.0	
Dynamic Characteristics						
Input Capacitance	C_{iss}	$\text{V}_{\text{DS}}=15\text{V}, \text{V}_{\text{GS}}=0\text{V},$ $f=1.0\text{MHZ}$	—	5075	—	pF
Output Capacitance	C_{oss}		—	1140	—	pF
Reverse Transfer Capacitance	C_{rss}		—	565	—	pF
Switching Characteristics						
Turn-On Delay Time	$t_{\text{d(on)}}$	$\text{V}_{\text{DD}}=15\text{V}, \text{I}_D=2\text{A}$ $\text{R}_G=2.5 \Omega, \text{R}_L=15 \Omega$ $\text{V}_{\text{GS}}=10\text{V}$ (Note3,4)	—	26	—	ns
Turn-On Rise Time	t_r		—	29	—	ns
Turn-Off Delay Time	$t_{\text{d(off)}}$		—	95	—	ns
Turn-Off Fall Time	t_f		—	38	—	ns
Total Gate Charge	Q_g	$\text{V}_{\text{DS}}=15\text{V}, \text{I}_D=30\text{A},$ $\text{V}_{\text{GS}}=10\text{V}$, (Note3,4)	—	38.4	—	nC
Gate-Source Charge	Q_{gs}		—	9.03	—	nC
Gate-Drain Charge	Q_{gd}		—	13.2	—	nC
Drain-Source Body Diode Characteristics and Maximum Ratings						
Continuous Diode Forward Current	I_S		—	—	140	A
Pulsed Diode Forward Current	I_{SM}		—	—	560	A
Diode Forward Voltage	V_{SD}	$\text{I}_S=10\text{A}, \text{V}_{\text{GS}}=0\text{V}$	—	—	1.2	V
Reverse Recovery Time	t_{rr}	$\text{V}_{\text{GS}}=0\text{V}, \text{I}_S=40\text{A},$ $d\text{I}/dt=100\text{A/us}$, (Note3)	—	42	—	ns
Reverse Recovery Charge	Q_{rr}		—	37	—	nC

Notes


- Repetitive Rating:pulse width limited by maximum junction temperature.
- $L=0.5\text{mH}, R_g=25 \Omega, I_{AS}=25\text{A}$, starting $T_j=25^\circ\text{C}$.
- $d\text{I}/dt=200\text{A/us}$, starting $T_j=25^\circ\text{C}$.Pulse width $\leq 300\text{us}$;duty cycle $\leq 2\%$.
- Repetitive rating; pulse width limited by maximum junction temperature.




TEST CIRCUIT AND WAVEFORM

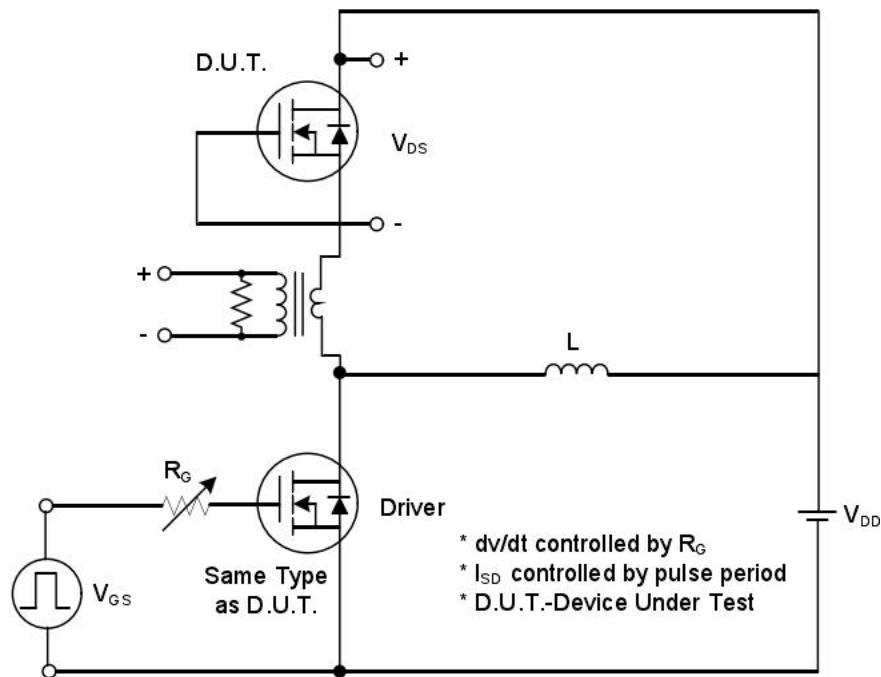


Peak Diode Recovery dv/dt Test Circuit

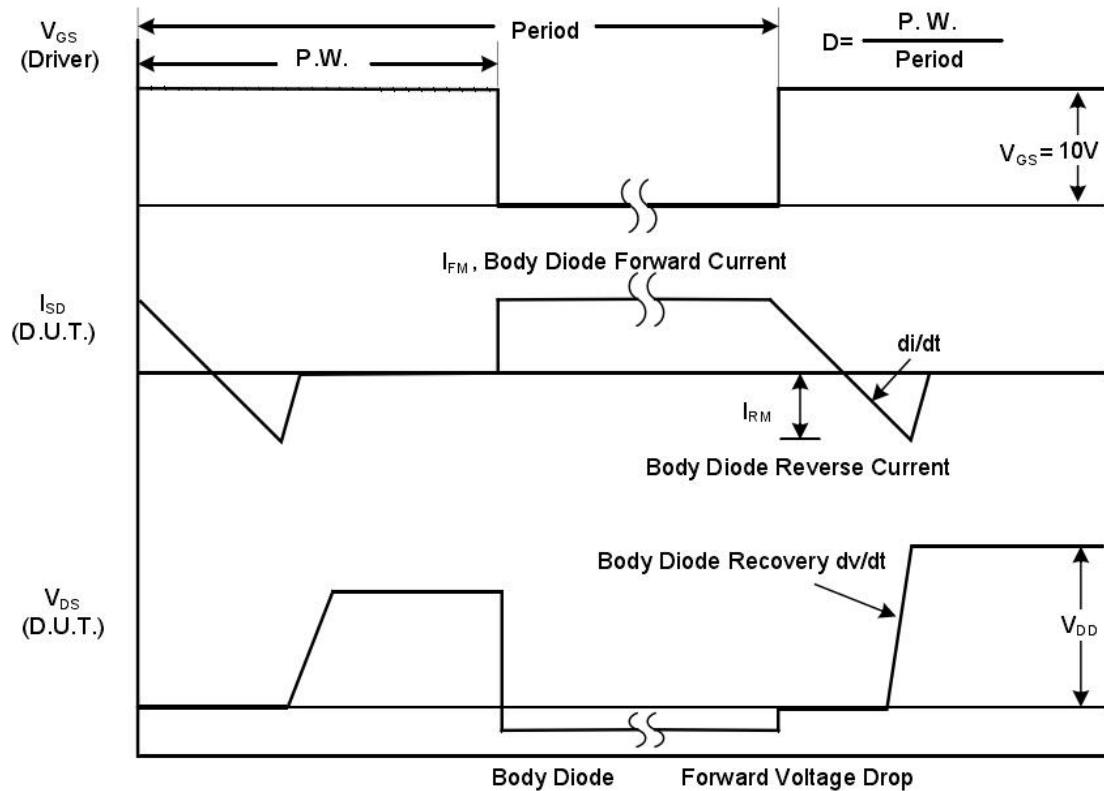


Peak Diode Recovery dv/dt Waveforms

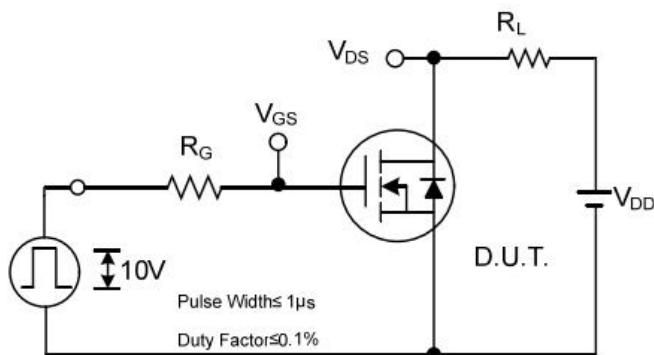


Switching Test Circuit

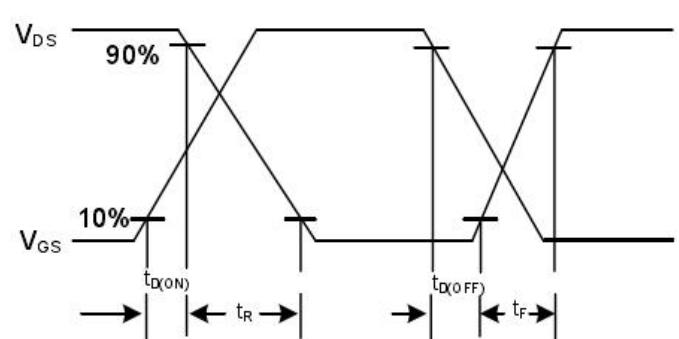


Switching Waveforms

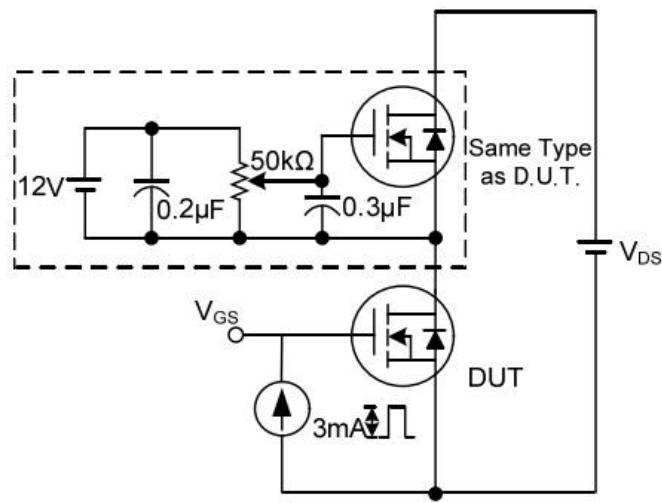


Gate Charge Test Circuit

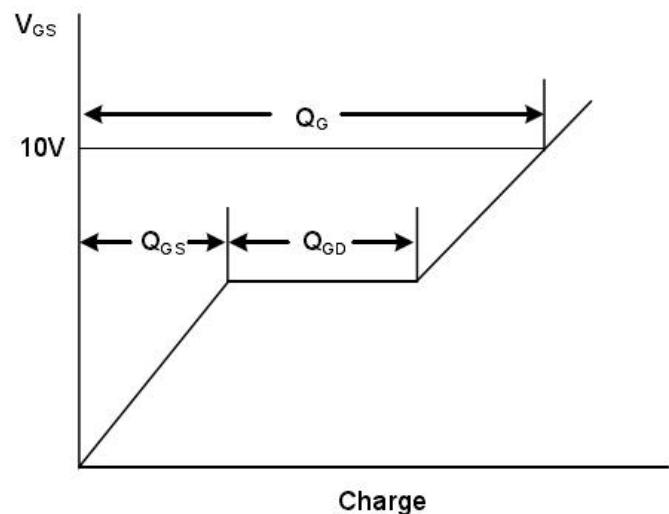

Gate Charge Waveform

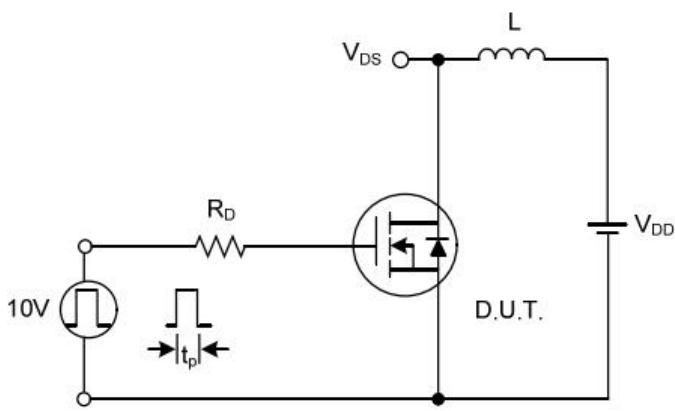







Unclamped Inductive Switching Test Circuit





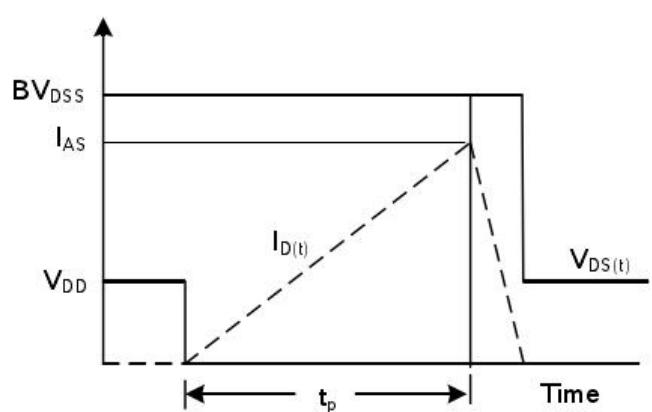


Unclamped Inductive Switching Waveforms



RATING AND CHARACTERISTIC CURVES

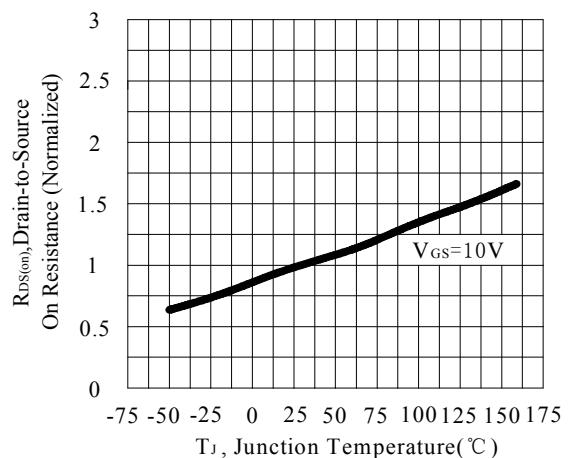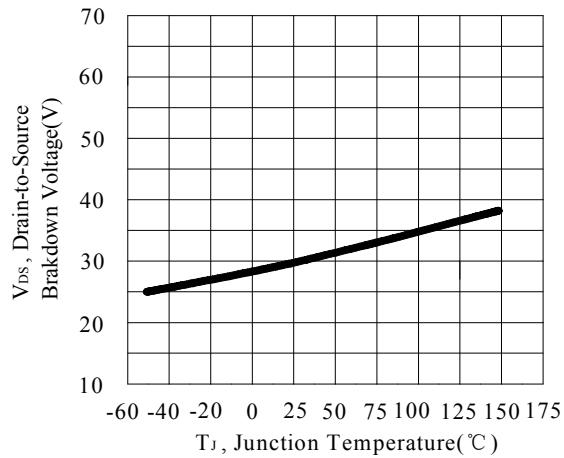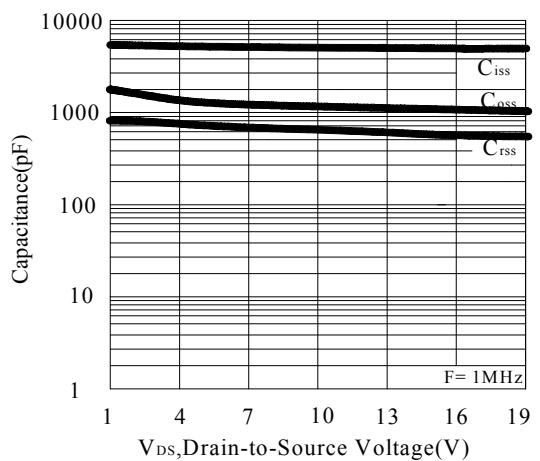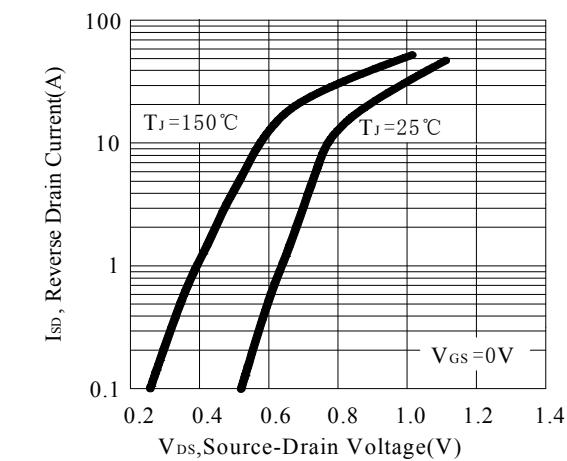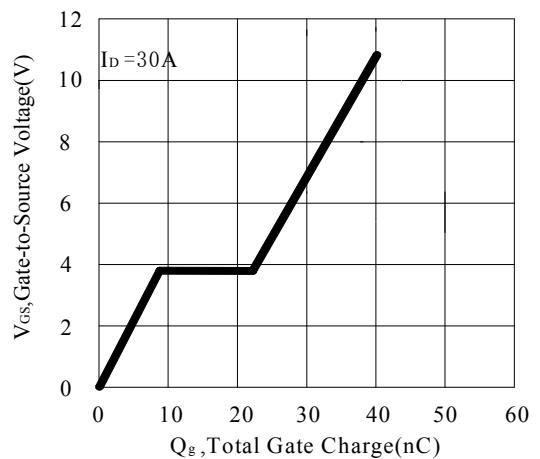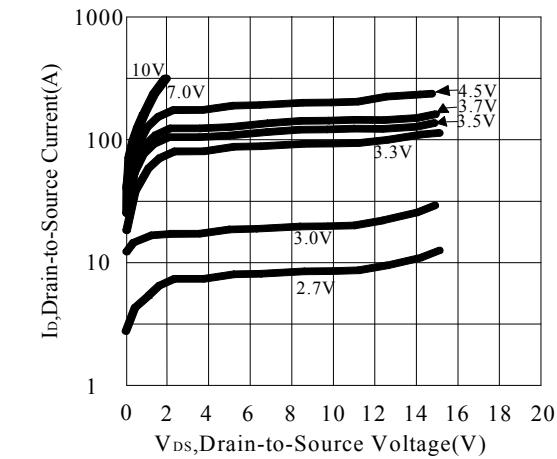


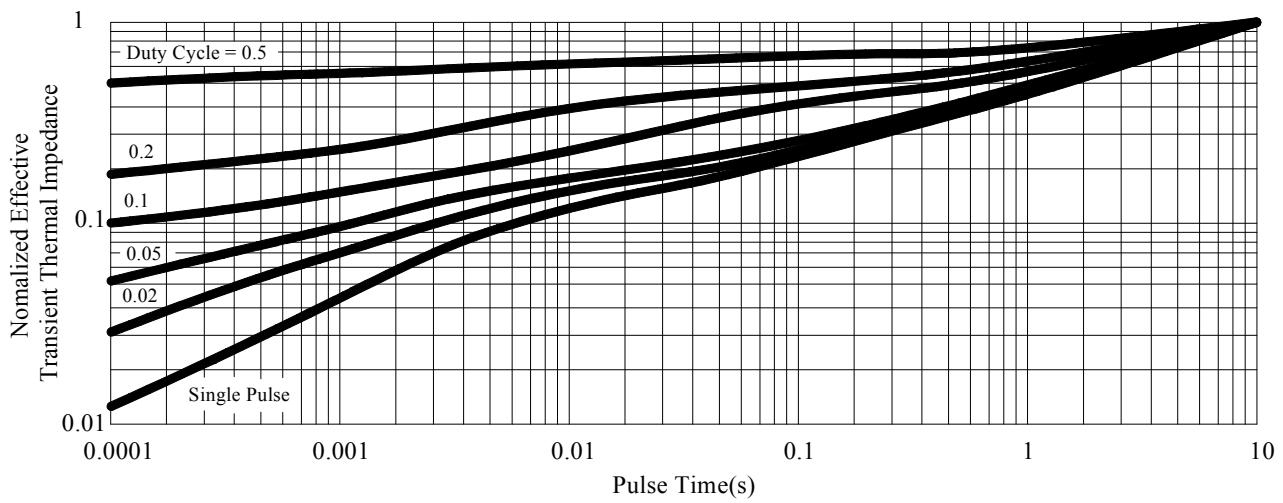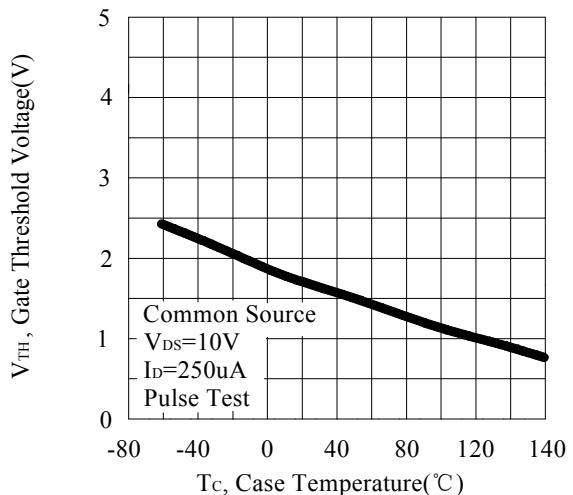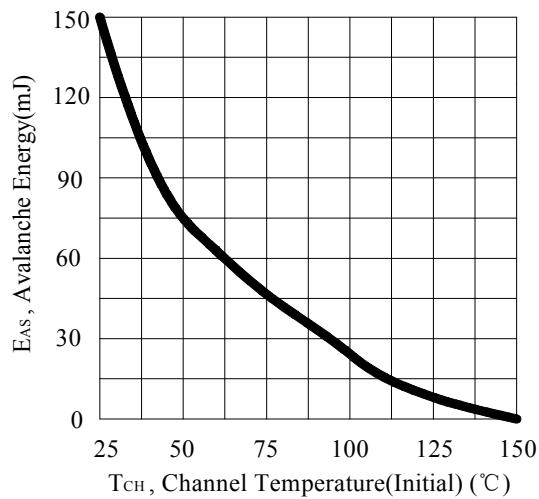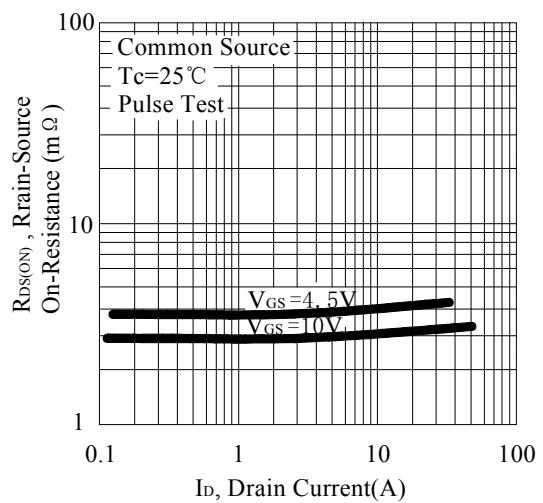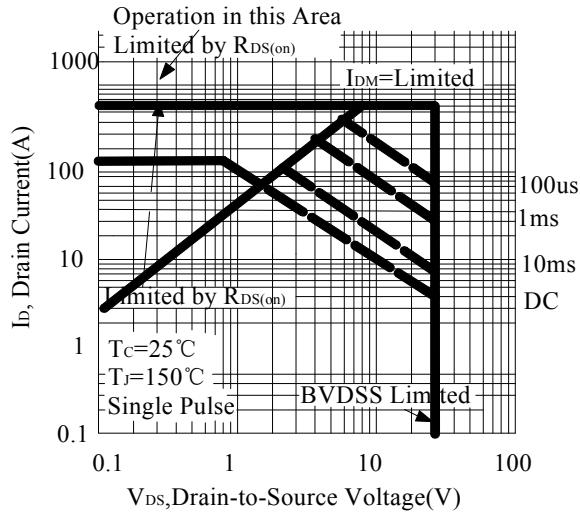



PACKAGE OUTLINE DIMENSIONS

TO-263

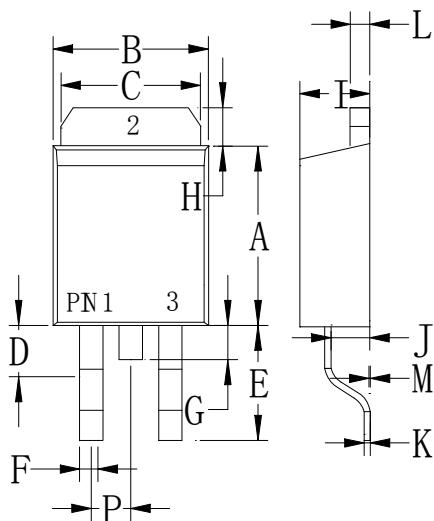

TO-263		
Dim	Min	Max
A	.323(8.20)	.348(8.85)
B	.394(10.0)	.413(10.5)
C	.394(10.0)	.402(10.2)
D	.077(1.95)	.100(2.55)
E	.204(5.17)	.227(5.77)
F	.027(0.68)	.037(0.94)
G	--	.067(1.70)
H	.046(1.17)	.053(1.34)
I	.175(4.44)	.191(4.86)
J	.100(2.54)	.110(2.79)
K	.014(0.35)	.025(0.64)
L	.047(1.20)	.055(1.40)
M	.000(0.00)	.010(0.25)
P	.095(2.41)	.105(2.67)

Dimensions in inches and (millimeters)